



NAKAYAMA
Co.,Ltd.

Wireless data reception unit

TM-RW-M

TM-RW-M outputs data of the temperature that a wireless thermometer made in us measured it.



Diverse models

TM-RW-M

Standard type.
(ID, Indication of the temperature)

TM-RW-M-AO

The output by the 4-20mA.

TM-RW-M-DO

The output by the serial communication.
(RS232C)

For the Windows OS.
(An exclusive program is with it)

TM-RW-M-PO


Measure the received temperature.

Operates the Lamp and Buzzer
according to the specified range.

Application


Printing (printout)

Print the time and ID and temperature

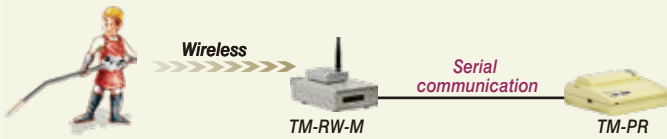


Data output

At time, I store ID, temperature as CSV (TXT) file

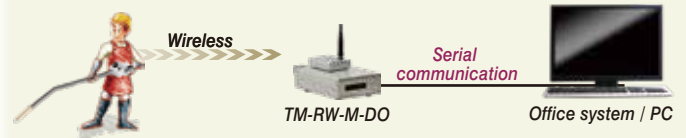


An option: Integration into equipment

Output temperature data
(1000~1700°C)

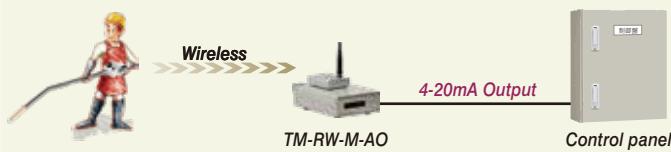

Special specifications: Temperature prediction, temperature monitoring, etc.

Measure the received temperature.
Operates the Lamp and Buzzer according to the specified range.

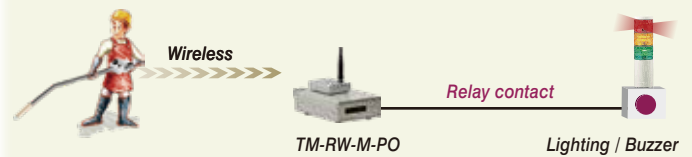

The tolerance level: Green lighting / Buzzer 1s
The tolerance level outside: Red lighting / Buzzer 20s

Common specifications

Type	TM-RW*
Dimensions	Main body: W130 × H60 × D220 mm (Includes rear connector) Antenna part: W65 × H350 × D85 mm
Weight	About 0.6kg
Radio frequency	429MHz (CH: 1~40 / Body operation / Switchable)
Interface	RS232 Option: 4-20 mA, Relay contact (4 points)
Power source	AC100-240V



Type	TM-PR*	Printing method	Serial dot thermal printer
Dimensions	W150×H150×D250 mm	Power supply	Exclusive adapter
Weight	About 2 kg	Remarks	Thermal paper type printer

*Multi-frequency types have “-M” at the end of the model number.



Wireless
thermometer

Please refer to the catalog of the TMW-3000-M.



The corresponding
consumables

Please refer to the catalog of the thermometer consumables.



NAKAYAMA
Co.,Ltd.

Sep. 2023 1st edition

■ **Head Office** 3-37-22 Kodama, Nishi-ku, Nagoya-City 451-0066 Japan
Tel: +81-52-521-1171 Fax: +81-52-521-1180
E-mail: nk-1972@nakayama-meps.co.jp

■ **Website;** <https://www.nakayama-meps.co.jp/>

■ **Eastern Japan business office**

Tel: +81-24-545-6588 Fax: +81-24-544-6588

